

STAINLESS STEEL BOLLARDS

Our round stainless steel bollards are offered in 3 designs: below ground for installation into a concrete footing, core drilled for installation into a core drilled hole using epoxy adhesive, and surface mount for bolted installations.

Manufactured from 304 grade stainless steel as standard, they are all finished with No. 4 mechanical finish before being electro-polished. This is recommended for installation near coastal areas to minimise the risk of tea staining and to ensure the bollards maintain a high quality appearance over many years.

Welded caps

All our stainless steel bollards have a fully welded and polished cap. This helps present a high quality appearance required for architectural environments.

Optional skirts

For the ultimate high quality presentation, polished stainless steel skirts are available as an option to cover the base plates and fixings.

Value features:

- » 304 grade polished stainless steel.
- » Electro-polished for maximum protection.
- » Choice of two wall thicknesses.
- » Three methods of installation.
- » 90 or 140mm diameter.
- » Optional cover skirts available.




C90SM-SS10 with optional base cover COV90-SS.



Welded and polished flat cap.



Optional skirts.

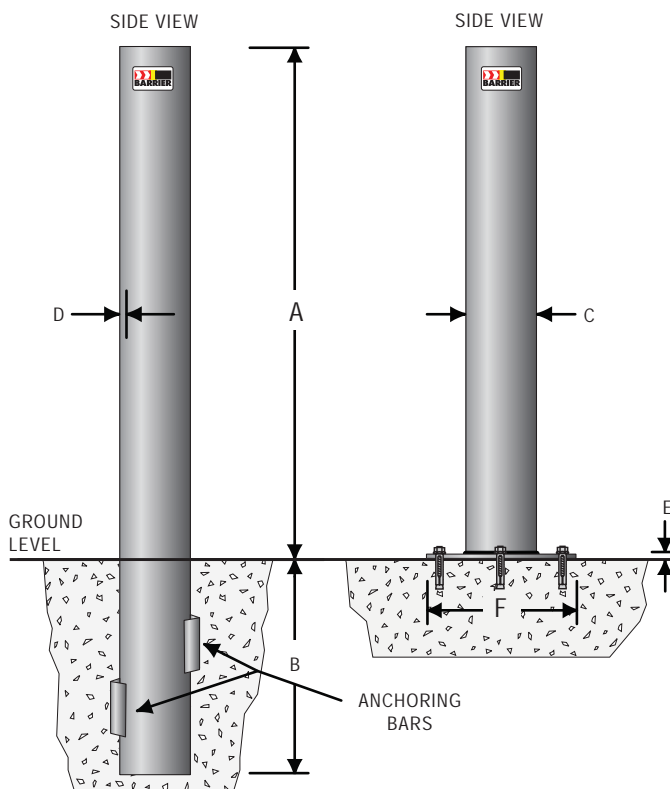

BELOW-GROUND & SURFACE MOUNT MODELS

PART NO.	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Stainless Grade	Weight (kg)	Cap	Surface Finishes	
										L	EP
C90BG-SS	900	300	90	5.49	–	–	304	14.5kg	Welded Flat	✓	✓
C90CD-SS	900	200	90	5.49	–	–	304	14.5kg	Welded Flat	✓	✓
C90SM-SS	900	–	90	5.49	6	225	304	10.5kg	Welded Flat	✓	✓
COV90-SS	Optional 90mm base cover – stainless steel							0.3kg	N/A	✓	✓
C140BG-SS	1200	500	140	3.40	–	–	304	25kg	Welded Flat	✓	✓
C140CD-SS	1200	200	140	3.40	–	–	304	22kg	Welded Flat	✓	✓
C140SM-SS	1200	–	140	3.40	10	300	304	19kg	Welded Flat	✓	✓
COV140-SS	Optional 140mm base cover – stainless steel							0.5kg	N/A	✓	✓

Surface Finish: L – No.4 Linished. EP – Electro-polished.