

PORT-A-GUARD MAXI

With a standard opening of 6.7 metres, the Maxi takes the Port-a-guard range to a new level of versatility.

With an increased height, reduced gap between the floor and the bottom of the barrier and smaller opening size between the slats, the Maxi offers an even greater level of security and safety.

A combination of aluminium slats, galvanised slide components and stainless steel fixings means the Maxi is suited to both indoor or outdoor applications. The maxi now has locking castors as standard.

Value features:

- » Complete with heavy duty locking castors.
- » Non-corrosive construction for outdoor use.
- » Increased safety and security due to reduced opening sizes.
- » Can be linked together to form a continuous barrier.
- » Easily transported by one person.

Specifications


Description:	Portable expanding barrier.
Material:	Slats & posts – extruded aluminium. Slide guides – Hot dipped galvanised steel. Assembly fittings – Stainless steel.
Finish:	Natural aluminium.
Height (open):	1430 mm from ground to top of slats.
Width:	Open 6.7 metre / Closed 580mm.
Weight:	32.2 kgs.

PART No.	DESCRIPTION
BPGM140	Port-a-guard Maxi 1430mm x 6.7 metre
BPG-WR	Wall receiver bracket
BPG-MC	Replacement middle castor assembly
BPGM-RF	Replacement foot with 2 castors



Port-a-guard Maxi comes standard with 4 heavy duty locking swivel castors and central fixed dolly wheels for ease of movement from one location to another.

Alternatively, Maxi can be wall mounted at one end using the optional wall receiver bracket and rolled out as required with minimal effort.

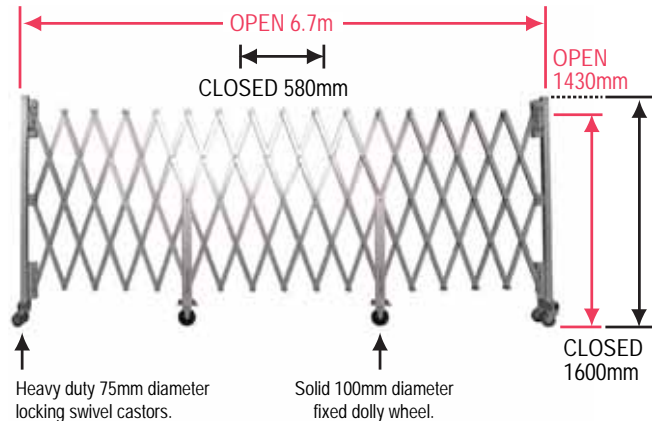

Port-a-guard Maxi 140



BPGM140 Port-a-guard Maxi.