



Replaces all previous versions

Effective 1st June 2004

# Rotating Beacons

- Suppression level 3 as per VDE0879, part 3
- Degree of protection IP54, IP54K, IP59K
- Enables interference free radio reception

## RE-60 Form FLX

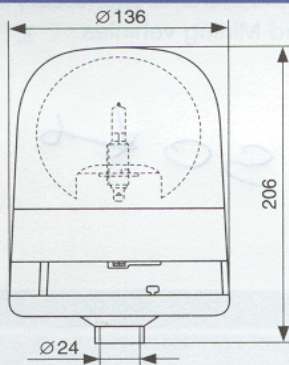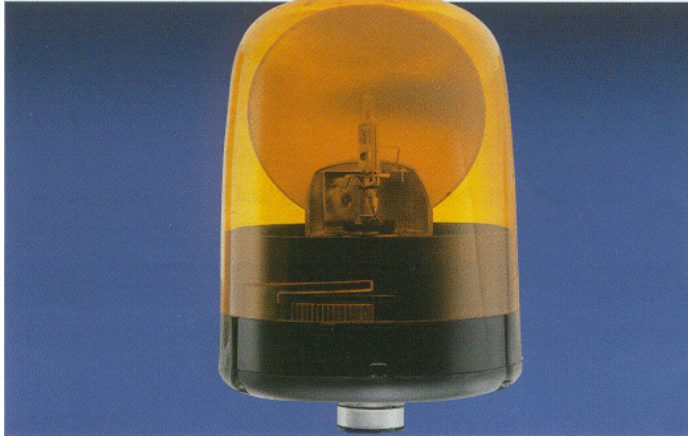

Form FLX as per ISO 4148

With flexible base, for mounting on spigot tube.  
 Hood of unbreakable polycarbonate.  
 Maximum inclination upon contact with obstacle: 90°.  
 Weight: approx. 0.68 kg

**Pack includes:** Light, H1 bulb, installation instructions.


### Part numbers

RE-60 Form FLX	12 V	yellow	7 782 332 009
RE-60 Form FLX	24 V	yellow	7 782 334 008

### Accessories and Spare Parts ( Form FLX and Form D )

Plexi glass lens - yellow Form FLX	8 785 510 157
Plexi glass lens - yellow Form D	8 785 510 156
Reflector form D	8 785 300 087
Motor 12V	8 787 220 627
24V	8 787 220 628
Globe H1 12V 55W	11255
24V 70W	12470
Flexible Base w/cables, plug & clamp Form FLX	8 785 110 121

## RE-60 Form D

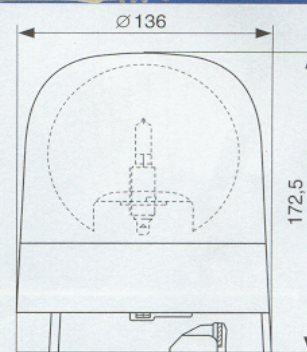

Form D as per ISO 4148

Fastened using powerful magnets (approx. 30 kg adhesion as per DIN).  
 For vehicle speeds up to max. 100 km/h (approx. 63 mph).  
 Connection via spiral cable and universal vehicle connector.  
 Weight: approx. 1.0 kg

**Pack includes:** Light, H1 bulb, spiral cable with connector, installation instructions.

### Part numbers

RE-60 Form D	12 V	yellow	7 782 372 003
RE-60 Form D	24 V	yellow	7 782 374 005