

## Forklift Attachments

## Fork Tines


### Type FA Fork Tines

Type FA Fork Tines supplied by East West Engineering have been designed and manufactured in accordance with AS2359.1

Fork tines are supplied in a range of capacities and lengths. Always ensure that the rating of the fork tines is equal to or greater than the rated lift capacity of the fork truck.

**Note:** The fitting of fork tines with a lower rating than the fork truck could lead to failure, resulting in serious injury or death.

- Tough CrMo high tensile steel
- Light weight, slow wearing
- Standard ITA hooks

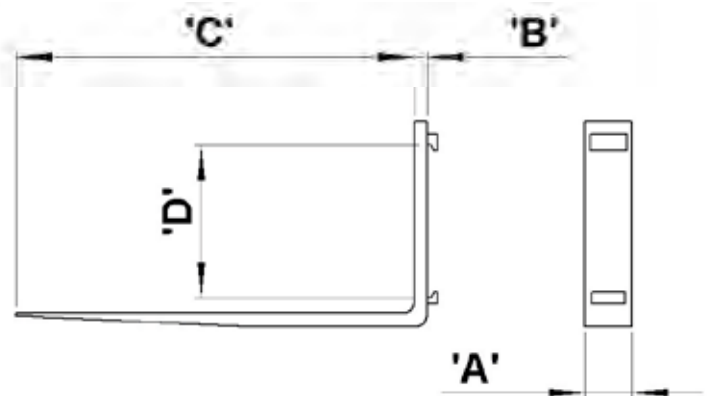

Type	Capacity at 500mm / pair	"A" mm	"B" mm	"C" mm	Mounting Class "D"	Weight Per pair
FA12-100	1200 kg	80	35	1000	Class 2 - 407 mm	64 kg
FA15-107	1500 kg	100	32	1070	Class 2 - 407 mm	72 kg
FA15-120	1500 kg	100	32	1200	Class 2 - 407 mm	83 kg
FA25-107	2500 kg	125	35	1070	Class 2 - 407 mm	96 kg
FA25-120	2500 kg	125	35	1200	Class 2 - 407 mm	107 kg
FA30-107	3000 kg	125	39	1070	Class 3 - 508 mm	112 kg
FA30-120	3000 kg	125	39	1200	Class 3 - 508 mm	130 kg
FA45-107	4500 kg	125	50	1070	Class 3 - 508 mm	154 kg
FA45-120	4500 kg	125	50	1200	Class 3 - 508 mm	166 kg

When fitting fork tines, ensure that the marking on the fork tine is compatible with the fork truck rating. Each fork tine is stamped on the side with the relevant information. The rating is for an individual fork tine and should be doubled to provide a total safe working load. Refer to the table above for ratings.