

HUSKEY™ II AC

High Power for Close Quarters

| MODEL | C4-26 AC | |
|------------------------------|-----------------------------|-----------|
| TYPE | Electric | |
| SPEED ¹ | 10 mph | 16 km/hr |
| RANGE ² | 30 miles | 48.3 km |
| DRAW BAR PULL ³ | | |
| ULTIMATE | 3,000 lbs | 13.3 kN |
| NORMAL | 600 lbs | 2.7 kN |
| TOWING CAPACITY ⁴ | 30,000 lbs | 13,610 kg |
| BATTERY COMPARTMENT | 32" L x 18.5" W x 24" H | |
| | 81.2 cm x 46.9 cm x 60.9 cm | |
| VOLTAGE | 48 volts | |
| TURNING RADIUS | 74.5 inches | 189 cm |

¹ Unloaded maximum speed

² Unloaded on dry clean level concrete or equivalent

³ Per ANSI B56.9 Standard

⁴ Based on:

- Dry clean level concrete or equivalent
- 600 lbs normal draw bar pull
- Trailer rolling drag = 20 lb per 1,000 lb towed



Vehicles may be shown with optional equipment

Tough and Dependable Product Solutions

The new generation Huskey™ II AC builds on the reliable history of the original Huskey™.

The Huskey™ II AC combines high power towing in a compact maneuverable tow tractor, while maintaining operator comfort and safety.

For most trailer systems, the Huskey™ II AC can tow up to 30,000 pounds gross towed load: impressive for a tractor only 39 inches wide and 93 inches long (including hitch). Towing power comes from an enclosed 17 hp AC motor coupled to the Taylor-Dunn GT drive.

This tractor is easy to maneuver with cushion grip steering wheel and 74.5 inch turning radius. The high ratio steering gear makes controlling the tractor effortless.

The Huskey™ II AC comes equipped with many standard features for operator comfort such as full 4-wheel suspension, remote lever to release the hitch, suspension seat, cushion grip steering wheel, and cup holder. Additional standard features such as high visibility driving position, lighting (headlight with dual brake, tail, and reverse lights), automatic parking brake, emergency stop switch, multifunction dash display, and full perimeter steel plate protection are provided for the safety of the driver and others. Options allow configurations to meet various applications. Additionally, Taylor-Dunn will factory modify vehicles to meet specific requirements; thus, maintaining OSHA compliance.

With over 160,000 vehicles in service and over 55 years of experience in the industry, Taylor-Dunn products are the best way to go about your business.



PERSONNEL CARRIERS



Aristocrat



Roadmaster

BURDEN CARRIERS



Taylortruck



Loadmaster



Model B Series



Electruck



Maintenance Expediter



Stepsaver



Stockchaser

TOW TRACTORS



Towmaster



Mule




TT 316



Model E



Huskey

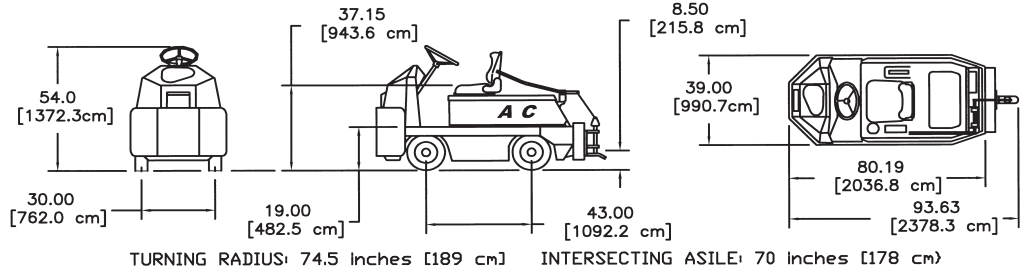

HUSKEY™ II AC SPECIFICATIONS

| Product Line | C4-26 AC | |
|---|---|-----------------------------|
| Unit Weight (less battery) | 2,700 lbs | 1,225 kg |
| Towing Capacity | 30,000 lbs | 13,610 kg |
| Draw Bar Pull: Ultimate | 3000 lbs | 13.3 kN |
| Normal | 600 lbs | 2.7 kN |
| Battery Compartment Size: Lift Out Battery | 32" L x 18.5" W x 24" H | 81.2 cm x 46.9 cm x 60.9 cm |
| Left Side Extract | 32" L x 18.5" W x 21.25" H | 81.2 cm x 46.9 cm x 54 cm |
| Battery Weight Range | 1,200 – 1,500 lbs | 544 – 680 kg |
| System Voltage | 48 volts | |
| Drive Axle | GT, Automotive Type Differential | |
| Transmission | Helical Gears in Oil Bath | |
| Motor | 17 hp AC, Enclosed | |
| Tires | 4.00 x 8 Soft Solid, Traction Tread | |
| Brakes | 4 Wheel Hydraulic Disc, Automatic Parking Brake | |
| Steering | 24:1 Ratio Automotive Type | |
| Frame | 3/16-inch Thick Steel Chassis with 1/2-inch Thick Full Perimeter Steel Plate Protection, Rear Traction Weight | |
| Suspension | Coil Springs Front and Rear with Shock Absorbers | |
| Color | Two Tone, Red Cowl and Battery Lid, Gray Chassis | |
| Seat | Adjustable, Suspended | |
| Controller | AC Solid State, Hi-Lo Speed Selector | |
| Instrumentation | Combination Display (battery status indicator, hour meter, fault code display, speedometer), Seat Interlock Switch, Emergency Stop Switch | |
| Lighting | Headlight with Dual Tail, Brake, and Reverse Lights Powered by Fully Isolated DC-DC Converter | |
| Hitch | Spring Loaded E-Type with Release Lever at Left Side of Driver | |
| Conformance | Type E OSHA 1910.178, ANSI B56.9 | |

HUSKEY™ II AC OPTIONAL FEATURES

- Left Side Battery Extract Frame
- Cab
- Hitches
- Governed Maximum Speed
- Extra Wide Traction Tires
- Factory Customization
Maintains OSHA compliance
Contact your local dealer for details



Specifications, standard equipment, accessories and modifications subject to change without notice.