


H-SERIES MINILIFT CAPACITY 200 KG

SPECIFICATIONS

- Maximum Load..... 200 kg
- Load Centre..... 350 mm
- Lift Height..... 100 - 1400 mm
- Battery..... 12 volt 18amp/hour
- Charge Time..... 6 hours
- Lifts/Charge..... 185 times
(raise/lower 100 kg)
- Dimensions..... 860L x 580W x 2020H mm
- Platform..... 600W x 550L mm
- Straddle width..... 465 mm
- Weight..... Trucks - 62 kg
Forks - 11 kg
Platform - 3 kg
- Wheels..... Polyurethane Tyred
Front - 100mm Dia Fixed.
(Optional Swivel)
Rear - 125 mm Dia Swivel
(braked)
- Safety..... Electronic Overload Protection

**Battery
Powered**

**IDEAL FOR USE
IN MANY AREAS,
INCLUDING**
 Hospital,
 warehouse,
 library,
 laboratory,
 catering,
 factory, etc

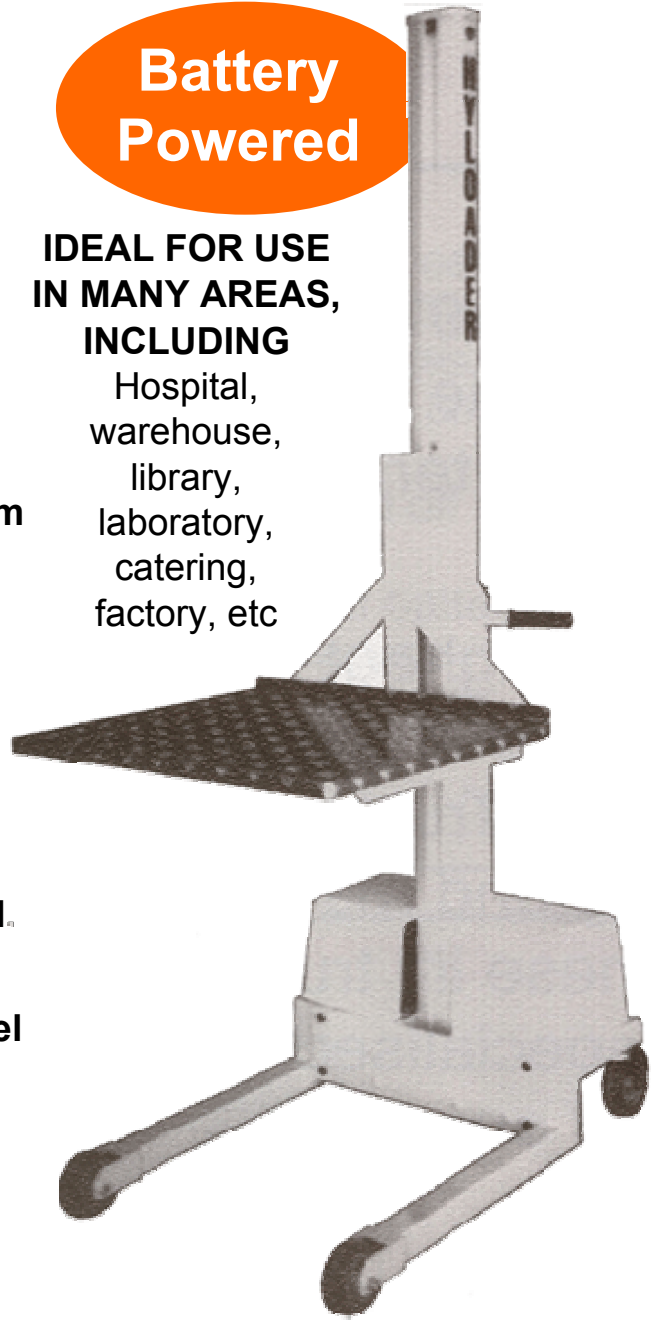

Part Number	Description
# Mini-HY	Minilift Base Unit less attachments (580mm o/aW x 2020mm mastH)
# MiniF/F-HY	Fixed Forks
# MiniSOP-HY	Slip on Platform-Size 580x600 Aluminium
# EM1-HY	Extended Mast to an additional 1m with standard capacity

Delivery Additional - Price Dependent on Location