

# MANTOVA - POST SHELVING - ALL SHELVES

## Diagram

### Specifications

#### Frames

Welded - 32mm x 2.5 mm roll formed section. Mild Steel or 304/ 316 grade stainless.

#### Shelves

Wire grid - Welded Frame  
 4 mm wires and 25 mm centres on 8 mm supports.

Real Tuff Moulded ABS Shelves - Black. Safe for freezers and dishwasher safe.

Dunnage Shelves - 25 mm x 25 mm x 1.6 tube frame for extreme loading to 400 kg. per shelf.

Solid "Drop-On" Shelves - Can be Galvanised or Stainless and can be used on all frames.

#### Posts

Galvanised or Stainless - 25 mm x 25 mm x 1.2 mm  
 Nylon Foot - gives 32 mm of adjustment

Stainless Foot - allows floor fixing and provides 65 mm adjustment.

Castors - 125 mm fit securely to leg.



Foot Pad - P/No. 1522 distributes load when used with nylon foot.  
 The use of Post Joiner P/No. 1500 enables any height to be achieved.

#### Finishes


Zinc Electroplate and Lacquer, Hot Dip Galvanised, Powder Coat, Polished Stainless, "As Welded" Stainless.

#### Dimensions

Length - 600 mm to 1800 mm increments of 150 mm.  
 Width: Wire Grid & Solid - 300, 375, 450, 525 and 600 mm  
 Width: Moulded ABS - 300, 450 & 600 mm  
 Height - Standard 1200, 1800 & 2000 mm

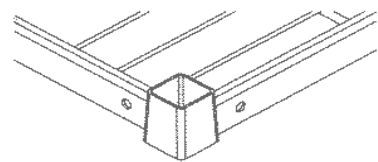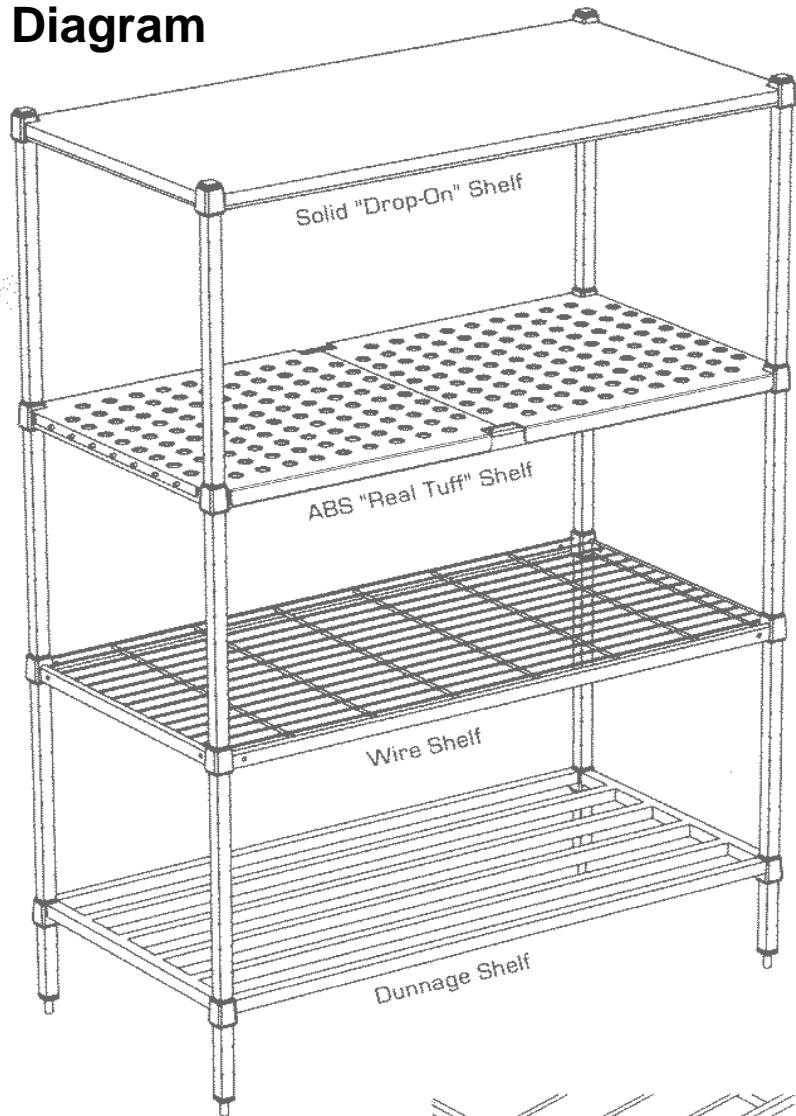

Wedge



Nylon Foot (Bullet Foot)