



# Ultra-OverPacks®

Versatile Ultra-OverPacks® Offer The Highest UN And DOT Certifications Available



- 359, 208, 113 and 75 litre models comply with UN Packaging Group 1 (X-Rating) and are certified for use as DOT Salvage Drums, 49 CFR 173.3 (c). Visit [www.SpillContainment.com](http://www.SpillContainment.com) for more regulatory information.
- High-density polyethylene construction offers excellent chemical resistance, including acids, caustics and corrosives.
- Convenient, "no-tools-required" closures are perfect for clean-up and spill response activities.
- Nestable design and low tare weight allow convenient storage and reduced transportation costs.

U.S. Patent Pending


Applications Include: • Overpacking of Damaged or Leaking Packages  
 • Collection and Transport of Soiled Sorbents • Clean-up of Contaminated Sites • Emergency Response • Direct Containment and Transport of Hazardous Solids • Use as Spill Kits



Use the 208 litre Ultra-OverPack to transport damaged 113 litre drums. Also a perfect size for spill kits!



Keep the 113 litre Ultra-OverPack in areas prone to small quantity spills — fill with sorbents to be ready for any emergency.

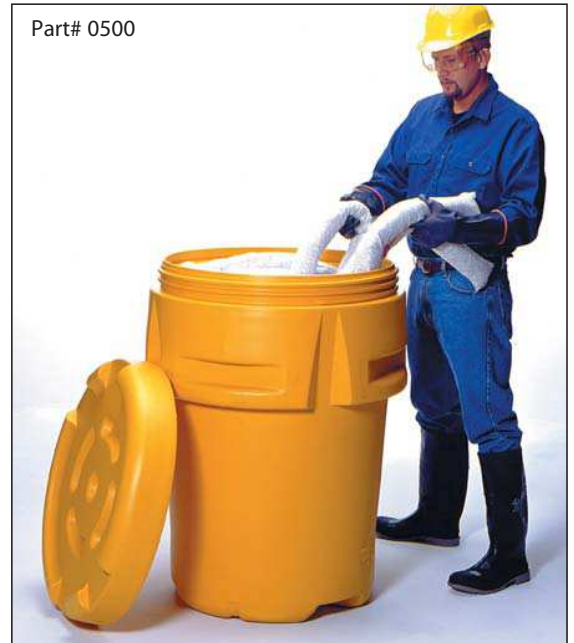

Large 359 litre Ultra-Overpack is great for spill kits.

All Ultra-OverPacks® Are Independently Certified For:

- LAND United Nations (UN) Transport of Dangerous Goods
- SEA International Maritime Organization (IMO); International Maritime Dangerous Goods Code (IMDG) Annex I-Section 8
- AIR International Civil Aviation Organization (ICAO); Technical Instructions for the Safe Transport of Dangerous Goods by Air, Part 7, Chapter 4
- AIR International Air Transport Association (IATA); Dangerous Goods Regulations, Section 10.3

ULTRA-OVERPACKS			
Part# 0500: 359 litres	Part# 0526: 208 litres	Part# 0510: 113 litres	Part# 0600: 75 litres
Top Outside Dia: 787 mm	Top Outside Dia: 631 mm	Top Outside Dia: 552 mm	Top Outside Dia: 552 mm
Bottom Outside Dia: 638 mm	Bottom Outside Dia: 508 mm	Bottom Outside Dia: 431 mm	Bottom Outside Dia: 450 mm
Outside Height: 1098	Outside Height: 952 mm	Outside Height: 717 mm	Outside Height: 425 mm
Weight: 21 kg	Weight: 10 kg	Weight: 8 kg	Weight: 7 kg
Rated Capacity: 359 litres	Rated Capacity: 208 litres	Rated Capacity: 113 litres	Rated Capacity: 75 litres
UN Marking: 1H2/X340/S/02/USA/AA0959	UN Marking: 1H2/X204/S/02/USA/AA1201	UN Marking: 1H2/X136/S/02/USA/AA0940	UN Marking: 1H2/X70.8/S/02/USA/AA1175

## Ultra TruckMount Brackets®

Carry Ultra-OverPacks® Under Trailers For Quick Response To Any Transportation Spill



- Store spill response products inside the 359 litre Ultra-OverPacks — sorbents, PopUp Pools, Drum Tourniquets and protective clothing are kept clean and moisture-free, ready for action.
- TruckMount Brackets are lockable for security purposes.
- Pre-drilled units can be quickly bolted to trailer undercarriage. (Hardware included)

ULTRA-TRUCKMOUNT BRACKETS
Part# 9085
Weight: 28 kg
Holds 359 litres Ultra-OverPack
Construction: Corrosion-resistant, epoxy-coated steel
Note: 359 litres Ultra-OverPack must be ordered separately.

Part# 9085

*Ultra-Overpacks are easily removed from their TruckMount brackets in any emergency situation.*

Waiting for a hazmat response vehicle can be costly — be proactive and equip your trucks with Ultra-TruckMount Brackets!