

Replace all previous versions


Effective 1st September 2007

# General Purpose 1 Channel Drop Over Cable Protectors with T-shaped connectors



**Ideal for Vehicle and Pedestrian Traffic in Public, Commercial, and Industrial Applications**

Single channel drop over systems protect valuable electrical cables, cords and hose lines from vehicle and foot traffic. Ideal where general purpose cable protection is required, such as temporary re-routing of single cable and hose lines, including fragile fiber optic telecommunications cable. We also offer ADA compliant cable ramps to fit these cable protectors.

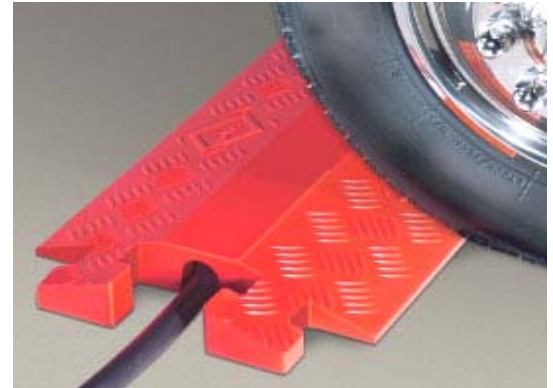

**Protects cables and lines with an outside diameter up to 31.25mm.**

## Features & Benefits

- **LOAD CAPACITY: 5,307 kg/tire (10,614 kg/axle)**
- Protects cables and hose lines up to 1.25 in. in diameter.
- All weather polyurethane construction.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, set-up, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols molded into lid surface.



## NOTE

**Drop Over protectors do not prevent abrasion from below.**

## ADA COMPLIANT ACCESSORIES

Meets Americans with Disabilities Act guidelines for ADA accessibility.

## SPECIFICATION DATA

Material : Polyurethane (UV stabilized)  
 Operating Temp : -40°F to 120°F (-40°C to 48°C)  
 Hinge Pin Material : Reinforced fiberglass  
 Safety Symbols : Per ANSI. Z535.3-1991


## LOAD CAPACITY PER TIRE/AXLE

1 Channel : Max Load at 70°F (21°C)  
 Per Tire : 11,700 lbs. (5,307 kg)  
 Per Axle : 23,400 lbs. (10,614 kg)

## WARNINGS



Symbols Molded into Protector

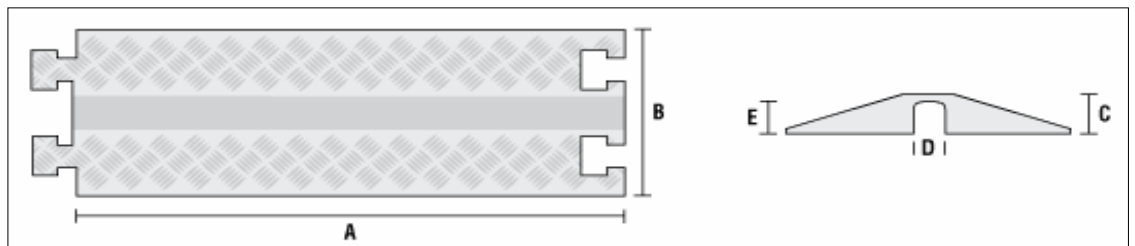

Model	Description	Colour	A Length	B Width	C Height	D Channel Width	E Channel Height	Weight kg
CP1X125-GP-DO-O	1-Channel Protector Drop Over	Orange	915 mm	292 mm	40.6 mm	31.8 mm	31.8 mm	5.9 kg
CP1X125-GP-DO-B		Black	915 mm	292 mm	40.6 mm	31.8 mm	31.8 mm	5.9 kg


**All prices subject to GST 10% - Australia Only - Freight Ex-Factory Additional**

All prices/specifications subject to change without notice.

Replace all previous versions

Effective 1st September 2007

# General Purpose 1 Channel Open Top Cable Protectors with T-shaped connectors




**Ideal for Vehicle and Pedestrian Traffic in Public, Commercial, and Industrial Applications**

Single channel open top systems protect valuable electrical cables, cords and hose lines from vehicle and foot traffic. Ideal where general purpose cable protection is required, such as temporary re-routing of single cable and hose lines, including fragile fiber optic telecommunications cable. We also offer ADA compliant cable ramps to fit these cable protectors.

**Protects cables and lines with an outside diameter up to 31.25mm.**

## Features & Benefits

- **LOAD CAPACITY: 5,307 kg/tire (10,614 kg/axle)**
- Protects cables and hose lines up to 1.25 in. in diameter.
- All weather polyurethane construction.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, set-up, disassemble and store.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols molded into lid surface.

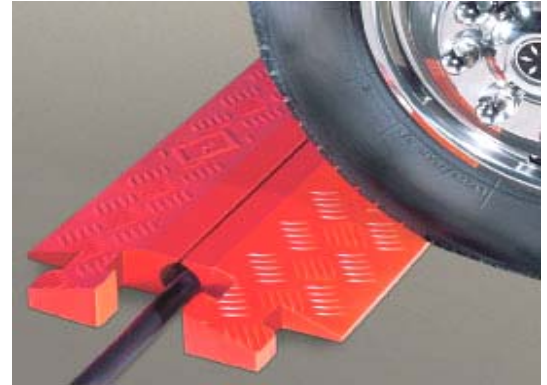

## ADA COMPLIANT ACCESSORIES

Meets Americans with Disabilities Act guidelines for ADA accessibility.

## SPECIFICATION DATA


Material : Polyurethane (UV stabilized)  
 Operating Temp : -40°F to 120°F (-40°C to 48°C)  
 Hinge Pin Material : Reinforced fiberglass  
 Safety Symbols : Per ANSI. Z535.3-1991

## LOAD CAPACITY PER TIRE/AXLE

1 Channel : Max Load at 70°F (21°C)  
 Per Tire : 11,700 lbs. (5,307 kg)  
 Per Axle : 23,400 lbs. (10,614 kg)

## WARNINGS

-  Symbols Molded into Protector
-  Protector

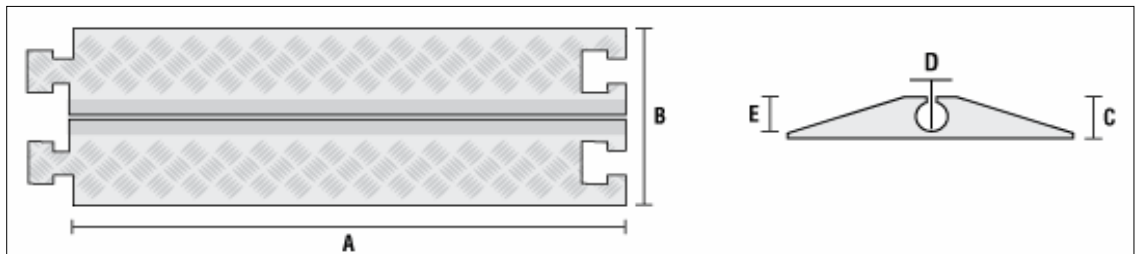

Model	Description	Colour	A Length	B Width	C Height	D Channel Width	E Channel Height	Weight kg
CP1X125-GP-O	1-Channel Protector Open Top	Orange	915 mm	292 mm	40.6 mm	31.8 mm	31.8 mm	5.9 kg
CP1X125-GP-B		Black	915 mm	292 mm	40.6 mm	31.8 mm	31.8 mm	5.9 kg

**All prices subject to GST 10% - Australia Only - Freight Ex-Factory Additional**

All prices/specifications subject to change without notice.