

Replace all previous versions

Effective 1st September 2007

Heavy Duty 4 Channel Cable Protectors

with T-shaped connectors




Ideal for heavy trucks and forklifts in industrial areas.

Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic.

Ideal for industrial environments where heavy duty cable protection is required.


Protects cables and lines with an outside diameter up to 33mm
End caps and 45° right & left turns available.

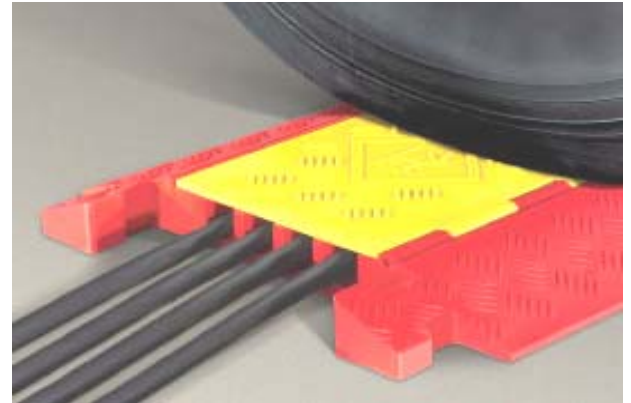

Features & Benefits

- **LOAD CAPACITY: 9,140 kg/tire (18,280 kg/axle)**
- Protects cables and hose lines up to 1.25 in. in diameter.
- All weather polyurethane construction.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, set-up, disassemble and store.
- End caps provide gradual taper to ground or floor.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols molded into lid surface.

WARNINGS



NEC REQUIREMENTS

Protects valuable electrical cables and permits compliance with 1996 National Electrical Code requirements (Article 525) for insulating electrical cables and cords at carnivals, fairs, amusement parks and similar events.

ADA COMPLIANT ACCESSORIES


Meets Americans with Disabilities Act guidelines for ADA accessibility.

SPECIFICATION DATA

Material : Polyurethane (UV stabilized)
 Operating Temp : -40°F to 120°F (-40°C to 48°C)
 Hinge Pin Material : Reinforced fiberglass
 Safety Symbols : Per ANSI. Z535.3-1991

LOAD CAPACITY PER TIRE/AXLE

5 Channels : Max Load at 70°F (21°C)
 Per Tire : 20,150 lbs. (9,140 kg)
 Per Axle : 40,300 lbs. (18,280 kg)

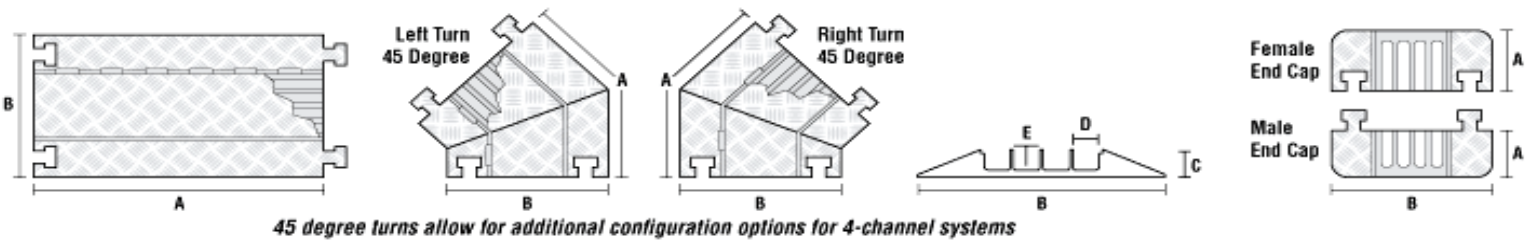

* Note: One channel on these protectors is 1.54 in. wide (39.2 mm).

Model	Description	Colour	A Length	B Width	C Height	D Channel Width	E Channel Height	Weight kg
CP4X125-YO	4-Channel Protector	Orange Lid Yellow Ramp	915 mm	508 mm	57.2 mm	47.1 mm	31.8 mm*	11.3 kg
CPEC4X125-O	End Caps (Pair Only)	(female) Orange (male) Orange	190.5 mm 133.4 mm	508 mm	57.2 mm	47.1 mm	31.8 mm*	3.4 kg
CPT4X125R-YO	45° Right Turn	Yellow Lid Orange Ramp	635 mm	508 mm	57.2 mm	47.1 mm	31.8 mm*	6 kg
CPT4X125L-YO	45° Left Turn		635 mm	508 mm	57.2 mm	47.1 mm	31.8 mm*	6 kg

All prices subject to GST 10% - Australia Only - Freight Ex-Factory Additional

All prices/specifications subject to change without notice.