



Ultra SpillDeck Plus Models

Extra Rugged SpillDeck Plus Units Provide Containment For Heavy Equipment and Machinery



2- and 4-drum modules can be connected together with optional bulkhead fittings to increase overall sump capacity. A virtually unlimited number of configurations is available.

Note: Heavy-Duty Ramp (Part# 2353) is required for applications involving forklifts or tow motors.


U.S. Patent No. 5,562,047

ULTRA-SPILLDECK PLUS MODELS

| Ultra-SpillDeck Plus P2 Module | Ultra-SpillDeck Plus P4 Module | Ultra-SpillDeck Plus Loading Ramp |
|---------------------------------|----------------------------------|---|
| Part# 2222 | Part# 2223 | Part# 0438 |
| Dimensions: 1384 x 692 x 107 mm | Dimensions: 1384 x 1384 x 107 mm | Dimensions: 939 x 673 x 107 mm |
| Weight: 25 kg | Weight: 47 kg | Weight: 35 kg |
| Load Rating: 4535 kg / sq ft. | Load Rating: 4535 kg / sq ft. | Load Capacity: 453 kg / sq ft. |
| Containment Capacity: 66 litres | Containment Capacity: 132 litres | Options: 660 mm T-Strip (2 required per long side) Bulkhead Fitting, Sidewall Plug |

Ultra SpillDeck Fluorinated Models

Use Fluorinated SpillDecks With Chlorinated Solvents And Other Aggressive Chemicals That May Not Be Compatible With Standard Polyethylene

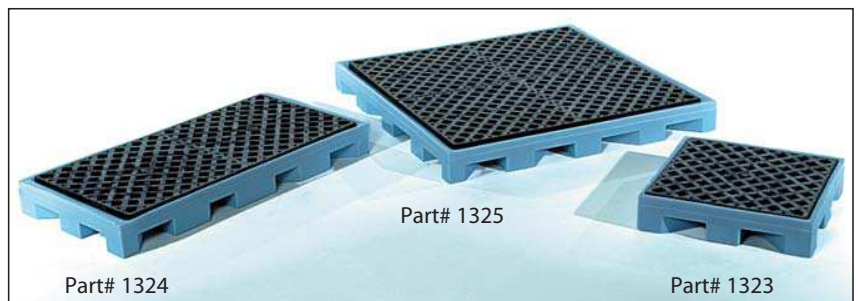

ULTRA-SPILLDECK — FLUORINATED MODELS

| Ultra-SpillDeck P1 Fluorinated | Ultra-SpillDeck P2 Fluorinated | Ultra-SpillDeck P4 Fluorinated |
|--|-------------------------------------|-------------------------------------|
| Part# 1323 | Part# 1324 | Part# 1325 |
| Dimensions: 657 x 657 x 146 mm | Dimensions: 1320 x 657 x 146 mm | Dimensions: 1320 x 1320 x 146 mm |
| Weight: 10 kg | Weight: 18 kg | Weight: 28 kg |
| Uniformly Distributed Load: 680 kg | Uniformly Distributed Load: 1360 kg | Uniformly Distributed Load: 2721 kg |
| Containment Capacity: 41 litres | Containment Capacity: 83 litres | Containment Capacity: 166 litres |
| Options: 660 mm T-Strip, Bulkhead Fitting, Sidewall Plug | | |