




Ultra  SpillDecks®

## Low Profile, Modular SpillDecks Allow You To Design And Create A Containment System That Meets Your Specific Needs

Ultra-SpillDecks are available in 1, 2 and 4-drum modules. Modules are easily connected together with bulkhead fittings to allow a virtually unlimited number of customized configurations.




*Bulkhead fittings allow spills to flow to adjacent sump areas, increasing containment capacity while maintaining a low profile.*

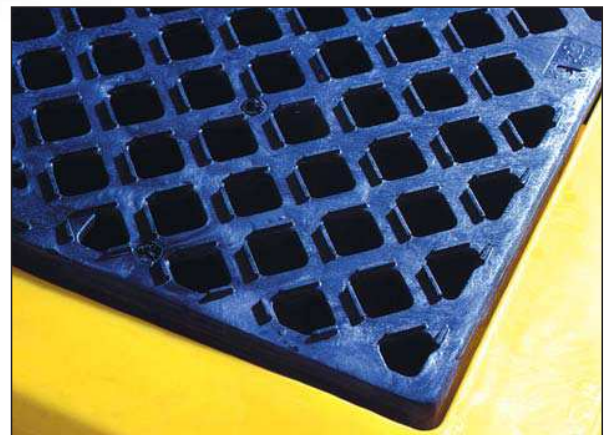

- Polyethylene construction meets a wide range of chemical compatibility needs.
- Low profile, 146 mm height offers safe and convenient loading/unloading of drums.
- Applications include hazardous waste collection, storage of virgin chemicals, drum dispensing and battery storage.
- Optional Loading Ramps provide added drum handling safety and convenience.
- **Meet SPCC, EPA Container Storage Regulation 40 CFR 264.175 and Uniform Fire Code Spill Containment Regulations.**

**All Ultra-SpillDecks offer slip-resistant grating to reduce OSHA slip hazards.**

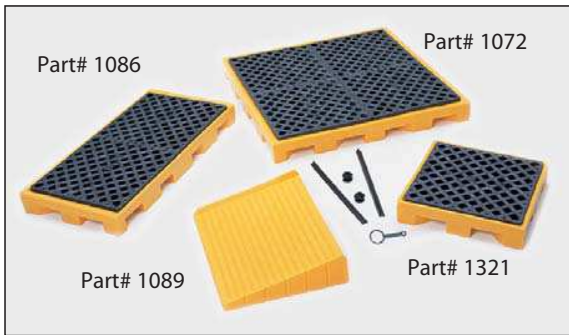

Connect your choice of 1, 2 and 4-drum SpillDeck modules to custom-design your own secondary containment storage pad.



The bulkhead fittings not only "lock" connected modules together, but allow spilled liquid to flow from one module to the next. Ultra-SpillDeck Containment Systems meet SPCC, EPA and Uniform Fire Code Spill Containment Regulations when assembled in configurations of six (6) drums or more.

U.S. Patent No. 5,562,047

| ULTRA-SPILLDECKS                   |                                     |                                     |  |
|------------------------------------|-------------------------------------|-------------------------------------|--|
| Ultra-SpillDeck P1 Module          | Ultra-SpillDeck P2 Module           | Ultra-SpillDeck P4 Module           | Ultra-SpillDeck Loading Ramp   |
| Part# 1321                         | Part# 1086                          | Part# 1072                          | Part# 1089   |
| Dimensions: 657 x 657 x 146 mm     | Dimensions: 1320 x 657 x 146 mm     | Dimensions: 1320 x 1320 x 146 mm    | Dimensions: 609 x 812 x 146 mm   |
| Weight: 10 kg                      | Weight: 18 kg                       | Weight: 28 kg                       | Weight: 7 kg   |
| Uniformly Distributed Load: 680 kg | Uniformly Distributed Load: 1360 kg | Uniformly Distributed Load: 2721 kg | Options: 660 mm T-Strip, 2 required/long side Bulkhead Fitting Sidewall Plug |
| Containment Capacity: 41 litres    | Containment Capacity: 83 litres     | Containment Capacity: 166 litres    |  |

## Ultra SpillDeck P6 and P8

Available in 6-drum and 8-drum models, Ultra-SpillDecks are perfect for satellite collection of hazardous wastes or storage of virgin chemicals.

- One-piece, molded sump with elevated 609 x 1219 mm black grates.
- Polyethylene grates feature slip resistant, "diamond plate" surface design.
- Deck holds up to 680 kg per drum UDL (uniformly distributed load).
- Designed for use with Ultra-SpillDeck Loading Ramp (Part# 1089).
- Meet SPCC, EPA and Uniform Fire Code Spill Containment Regulations.

**NEW!**



| ULTRA-SPILLDECKS                    |                                     |
|-------------------------------------|-------------------------------------|
| Ultra-SpillDeck P6                  | Ultra-SpillDeck P8                  |
| Part# 1175                          | Part# 1075                          |
| Dimensions: 1885 x 1270 x 133 mm    | Dimensions: 2501 x 1270 x 133 mm    |
| Weight: 39 kg                       | Weight: 49 kg                       |
| Uniformly Distributed Load: 4082 kg | Uniformly Distributed Load: 5443 kg |
| Containment Capacity: 249 litres    | Containment Capacity: 283 litres    |