

Replace all previous versions

Effective 1st September 2007

Heavy Duty 3 Channel Cable Protectors


with T-shaped connectors



Ideal for heavy trucks and forklifts in industrial areas.

Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic.

Ideal for industrial environments where heavy duty cable protection is required. We also offer ADA compliant cable covers and bridges to fit these cable protectors.

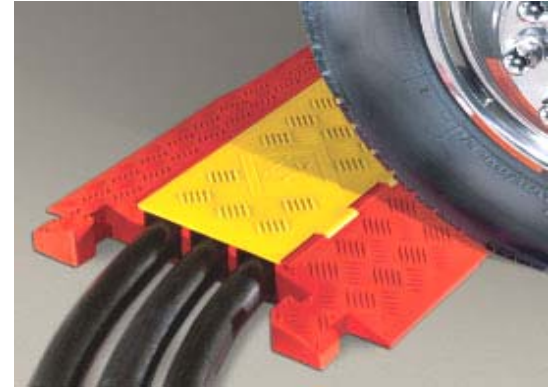


Protects cables and lines with an outside diameter up to 56.25mm
End caps and 45° right & left turns available.

Features & Benefits

- **LOAD CAPACITY: 6,446 kg/tire (12,892 kg/axle)**
- Protects cables and hose lines up to 1.25 in. in diameter.
- All weather polyurethane construction.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, set-up, disassemble and store.
- End caps provide gradual taper to ground or floor.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols molded into lid surface.

WARNINGS



NEC REQUIREMENTS

Protects valuable electrical cables and permits compliance with 1996 National Electrical Code requirements (Article 525) for insulating electrical cables and cords at carnivals, fairs, amusement parks and similar events.

CAUTION


Ramp angle on 3 channel protectors is fairly steep. If forklifts or other vehicles with small wheels will be crossing these protectors, Cross-Guard ADA compliant ramps are highly recommended.

SPECIFICATION DATA

Material : Polyurethane (UV stabilized)
 Operating Temp : -40°F to 120°F (-40°C to 48°C)
 Hinge Pin Material : Reinforced fiberglass
 Safety Symbols : Per ANSI. Z535.3-1991

LOAD CAPACITY PER TIRE/AXLE

5 Channels : Max Load at 70°F (21°C)
 Per Tire : 14,210 lbs. (6,446 kg)
 Per Axle : 28,420 lbs. (12,892 kg)

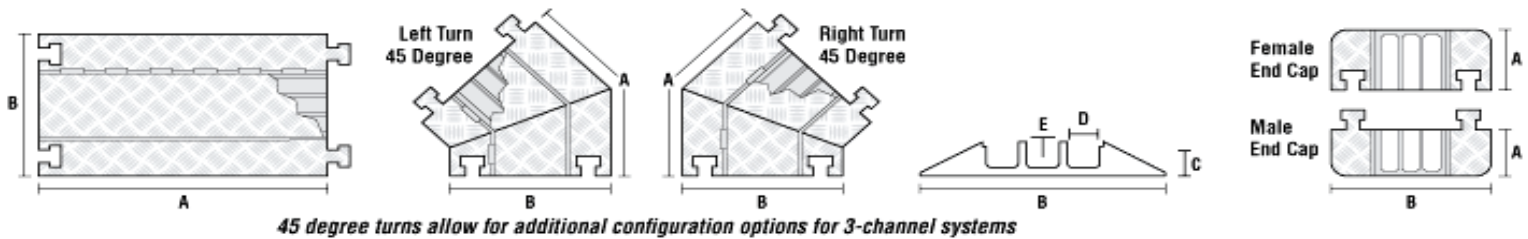

Model	Description	Colour	A Length	B Width	C Height	D Channel Width	E Channel Height	Weight kg
CP3X225-YO	3-Channel Protector	Orange Lid Yellow Ramp	915 mm	508 mm	77.5 mm	57.2 mm	57.2 mm	14.7 kg
CPEC3X225-O	End Caps (Pair Only)	(female) Orange (male) Orange	209.6 mm 152.4 mm	508 mm	77.5 mm	57.2 mm	57.2 mm	3.8 kg
CPT3X225R-YO	45° Right Turn	Yellow Lid Orange Ramp	635 mm	508 mm	77.5 mm	57.2 mm	57.2 mm	7.2 kg
CPT3X225L-YO	45° Left Turn		635 mm	508 mm	77.5 mm	57.2 mm	57.2 mm	7.2 kg

All prices subject to GST 10% - Australia Only - Freight Ex-Factory Additional

All prices/specifications subject to change without notice.