

Replace all previous versions

Effective 1st September 2007

# General Purpose 5 Channel Cable Protectors

## with T-shaped connectors



**Ideal for Vehicle and Pedestrian Traffic in Public, Commercial, and Industrial Applications**

Protect valuable electrical cables, cords and hose lines from damage and abuse while ensuring a method of safe passage for vehicles and pedestrian traffic.  
 We also offer ADA compliant cable ramps and bridges to fit these cable protectors.

**Protects cables and lines with an outside diameter up to 33mm.**

### Features & Benefits

- **LOAD CAPACITY: 4,763 kg/tire (9,526 kg/axle)**
- Protects cables and hose lines up to 1.3 in. in diameter.
- All weather polyurethane construction.
- Hinged lid makes placing and removing cables and hose lines easy.
- Patented 5-bar tread surface provides maximum traction.
- Heavy duty T-shaped connector interlocks modular sections.
- Lightweight and easy to transport, set-up, disassemble and store.
- End caps provide gradual taper to ground or floor.
- Carrying handle is conveniently recessed on underside of protector.
- Safety warning symbols molded into lid surface.



Illustrated colour non-standard;  
 Standard Colour: Orange Lid with Yellow Base

Other colours available - minimum order quantity and lead time applies.

### NEC REQUIREMENTS

Protects valuable electrical cables and permits compliance with 1996

### ADA COMPLIANT ACCESSORIES

Meets Americans with Disabilities Act guidelines for ADA accessibility.

### SPECIFICATION DATA


Material : Polyurethane (UV stabilized)  
 Operating Temp : -40°F to 120°F (-40°C to 48°C)  
 Hinge Pin Material : Reinforced fiberglass  
 Safety Symbols : Per ANSI. Z535.3-1991

### LOAD CAPACITY PER TIRE/AXLE

5 Channels : Max Load at 70°F (21°C)  
 Per Tire : 10,500 lbs. (4,763 kg)  
 Per Axle : 21,000 lbs. (9,526 kg)

### WARNINGS

Symbols Molded into Lid

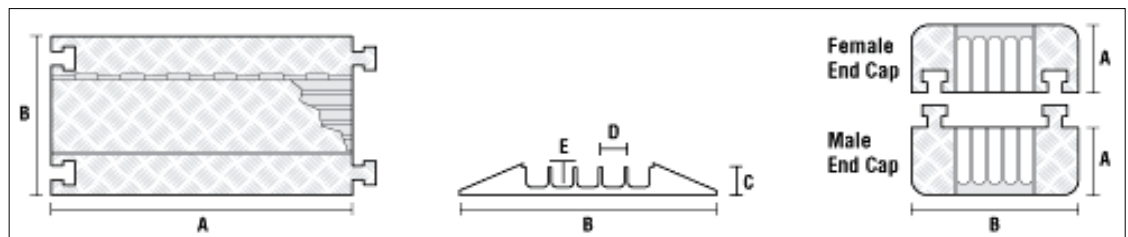

Model	Description	Colour	A Length	B Width	C Height	D Channel Width	E Channel Height	Weight kg	
CP5X125-GP-OY	5-Channel Protector	Orange Lid Yellow Ramp	915 mm	445 mm	50 mm	33 mm	33 mm	8.2 kg	
CP5X125-GP-OB		Orange Lid Black Ramp	915 mm	445 mm	50 mm	33 mm	33 mm	8.2 kg	
CP5X125-GP-BB		Black Lid Black Ramp	915 mm	445 mm	50 mm	33 mm	33 mm	8.2 kg	
CPEC5X125-GP	5-Channel End Caps (Pair only)	(female) Orange (male) Orange	120 mm	445 mm	50 mm	33 mm	33 mm	1.2 kg	

**All prices subject to GST 10% - Australia Only - Freight Ex-Factory Additional**

All prices/specifications subject to change without notice.