

Forward Bulk Bin Tipper **Forklift Bulk Bin Tipper**




Type FBT-M Bin Tipper

The FBT-M Forward Bin Tipper allows for 180 degree rotation of almost any bin. The bin tipper is manufactured to suit the dimensions as required by the customer. The bin tipper is operated without the forklift operator leaving the drivers seat. A safety chain prevents the unit from disengagement from the fork arms. Bins can be safely transported about the work site and emptied quickly where required. Available in either painted or zinc plated finish.



- Safe Working Load: 1500 kg
- Fork Pocket Size: 165 mm x 65 mm
- Fork Pocket Centres: 635 mm

(All other specifications determined by design)

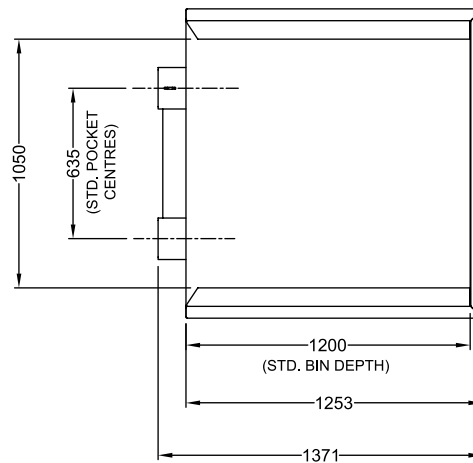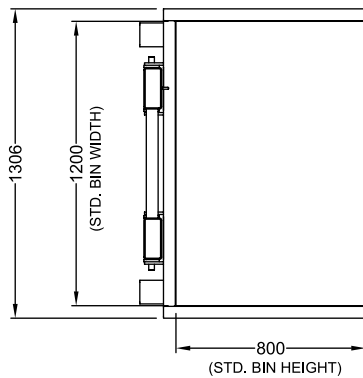

FORK ARM SLIPPERS

NOTE:
ALL DIMENSIONS SHOWN ARE TO SUIT A BIN 1200mm SQUARE x 800mm HIGH. ACTUAL SIZES WILL BE DETERMINED BY BIN DIMENSIONS SUPPLIED BY CUSTOMER

Forward Bulk Bin Tipper

Forklift Bulk Bin Tipper

Type FBT-SH Bin Tipper

The FBT-SH Forward Bin Tipper is ideal for handling and emptying bins in agricultural and manufacturing industries. This slip-on attachment requires only one hydraulic function.

A purpose built hydraulic sequencing valve eliminates the potential to drop the bin as rotation will not commence until the bin is secured into position, while the gentle action of the clamp arms prevents damage to the bins. The standard FBT-SH will suit bins up to 1200mm square, with a height range of 675 to 925mm. Enamel paint finish.



- Safe Working Load: 1000 kg
- Unit Weight: 290 kg
- Load Centre: 880 mm
- Lost Load: 300 mm
- Fork Pocket Size: 155 mm x 55 mm
- Fork Pocket Centres: 540 mm

