

Replaces all previous versions

Effective 27th September 2006

ORWAK 5070

Baler

Benefits

- Savings on your waste collection
- Tidy premises
- Space saving
- Ability to segregate waste
- Compliance to meet your legal obligations

Features

- Top loading
- Small machine
- Easy to use
- High performance
- Single phase
- Multi chambers

ORWAK 5070

ORWAK[®]



All prices/specifications subject to change without notice.

Replaces all previous versions

Effective 27th September 2006

ORWAK 5070

As easy to maintain as it is to operate

For sorting and baling paper packaging, cardboard, plastics, empty sacks etc. The Orwak 5070 takes care of both dry and semi-wet waste (Combi) by linking several chambers. The system can be extended as and when required.

Takes little space

The compact design and opportunity for flexibility in installation means the Orwak 5070 is easy to position.




Adjustable bale size

Bale size can be adjusted to suit the material and your needs. Finished bales are easy to handle with the accompanying bale trolley.

Documented operational safety

Uniquely designed press head and safety details. Increased service life.

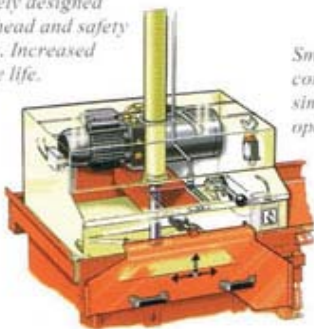

Smart all-in-one control lever for simple and safe operation.

All moving parts are built-in and inaccessible for maximum safety during operation.

Our promise to You!

- Orwak financial solutions
- Orwak money back guarantee
- Orwak non-stop service


For further information please contact Your local Orwak dealer.

The Orwak 5070 takes care of most of your waste

Paper ● Cardboard ● Shredded ● Paper sacks	Plastic foil ● Shrink film ● Plastic bags	Semi-dry Waste Bagged general waste
Metal Cans Aluminium cans Food cans Paint cans	Plastic containers ● PET bottles ● Jugs/bottles	Wet Juice boxes, Tetra paks
Other metals ● Steel straps	Other plastics ● Plastic straps	Special Steel drums Hazardous waste
● Perfect choice	● OK	Other materials contact us

Technical specifications

Dimensions
5070
 A: 2160 mm
 B: 1740 mm
 C: 735 (880*) mm
 D: 1430 mm
 E: 1205 mm
 *Including strap holders

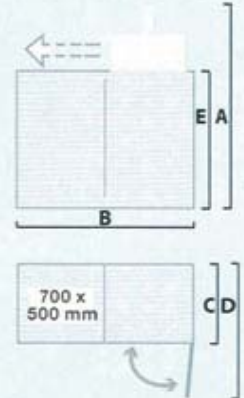

Loading aperture

Width: 700 mm
 Depth: 500 mm

Cycle time

36 secs

Press force

3 ton, 30 kN

Bale size

Width: 700 mm
 Depth: 500 mm
 Height: 700 mm

Bale weight

Cardboard: Up to 50 kg
 Plastic: Up to 80 kg

Chamber dimension (internal)

Width: 700 mm
 Depth: 500 mm
 Height: 960 mm

Weight (machine)

Total: 538 kg
 Only chamber: 365 kg
 Only press unit: 173 kg

Noise level

< 70 db (A)

Protection class

IP 55

Operating power

Single phase 230 V, 50 Hz, 10 A

Ground/top coatings

Anti-corrosive primer/
 two part paint and powder coat

Oil volume/type

4,9 l ISO VG 32-68 SAE 10
 from 0°C and warmer

Hydraulic data

Working pressure: 110 bar
 Relief pressure: 140 bar
 Press force: 3 ton, 30 kN
 Piston stroke: 790 mm

Please email to spacepac@spacepac.com.au for more information

All prices/specifications subject to change without notice.