

# FLAMMABLE

Liquid Storage Cabinets



## Trafalgar range of safety cabinets:

- Flammable Liquid | Corrosive Substance
- Toxic Substance | Forklift Gas Cylinder
- Organic Peroxide | Oxidising Agent
- Aerosol | Emergency Information
- Fire Hose Reel | Fire Extinguisher
- Fire Hydrant Booster | Fire Alarm Cabinet

# FLAMMABLE

Liquid Storage Cabinets

## Product Overview

**Trafalgar** is a long established and privately owned Australian company whose name is synonymous with the supply of hazardous chemical storage cabinets. Trafalgar has been making safety cabinets for over 50 years and will continue to do so into the future. We are proud to be fighting hard to keep manufacturing alive in Australia and competing against cheap and inferior imported products. From our manufacturing plant in Sydney's west, Trafalgar's range of **Flammable Liquid Storage Cabinets** are all locally made, built in accordance with Australian Standards and come in a range of sizes. A full range of spare parts, including additional shelves and closing mechanisms are available.



### Flammable Liquid Storage Cabinets

#### SUITABLE FOR SAFE STORAGE OF

- Petrol and petroleum derivatives
- Adhesives
- Printing inks and solvents
- Paints and solvents
- Any Class 3 liquids

All cabinets comply with **AS 1940-2004** as follows:-

1. Each cabinet is marked with the name and address of the manufacturer.
2. The maximum storage capacity.
3. A Class 3 dangerous goods label with sides of a least 250mm nominal.
4. A sign bearing the words "NO SMOKING, NO IGNITION SOURCES WITHIN 3M".



**Trafalgar has the expertise and capabilities to custom manufacture**

**safety cabinets.** Contact us to discuss your specific requirements.

# FLAMMABLE

## Liquid Storage Cabinets

# Key Features & Benefits

Isocyanate free two-pack epoxy coating inside and out, providing a hardwearing finish.

Danger alert sign indicating specific hazardous substances stored in cabinets.

Ventilation port, measuring 55mm in diameter.

Fully welded 150mm deep liquid tight sump capable of containing at least 25% of the maximum storage capacity.

Internal shelf brackets that fully interlock with shelves.



1.1mm thick double skin wall construction, with 40mm air gap between walls to provide thermal insulation.


Ventilation port, measuring 55mm in diameter.

Continuous piano hinges ensuring smooth closure of door.

Full instructions on usage of the cabinet attached to the inside of the door.

Build in ground connector.

Round corners on door.

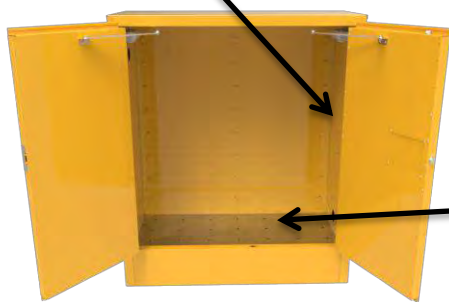

Fully adjustable galvanised shelves, perforated for leakages and to permit free air flow. Easily replaced if damaged.



Recessed handle with key lock. Two keys supplied.



Self closing door mechanism, sequential self closing on double door cabinets.



Three point self latching door mechanism.



# FLAMMABLE

Liquid Storage Cabinets

# Ordering Information

## FLAMMABLE LIQUID STORAGE CABINETS

Capacity (L)	30	60	100	160	250
Capacity (Units)	1 x 20L or 6 x 2.5L Tins	2 x 20L or 12 x 2.5L Tins	3 x 20L or 15 x 2.5L Tins	6 x 20L Drums	9 x 20L Drums
Part Number	TCFLS30L	TCFLS60L	TCFLS100L	TCFLS160L	TCFLS250L
Shelves	1	2	1	2	3
External Height (mm)	805	1070	810	1295	1830
External Width (mm)	525	515	935	1115	1120
External Depth (mm)	475	470	630	475	520
Internal Height (mm)	520	785	520	1045	1545
Internal Width (mm)	420	420	835	1015	1015
Internal Depth (mm)	375	375	530	375	420
Weight (kg)	53	62	100	138	187



30L



60L



100L



160L



250L

# FLAMMABLE

Liquid Storage Cabinets

# Ordering Information

FLAMMABLE LIQUID STORAGE CABINETS				
Capacity (L)	250LX Extra Capacity	425L	205L Vertical Drum	250L Economy
Capacity (Units)	12 x 20L Drums	16 x 20L Drums & 20 x 2.5L tins *	1 x Vertical Drum	12 x 20L Drums
Part Number	TCFLS250LX	TCFLS425L	TCFLS205LVD	TCFLS250LE
Shelves	3	3	N/A. Comes with roller base	3
External Height (mm)	1830	1780	1755	1830
External Width (mm)	1435	1380	840	760
External Depth (mm)	585	760	790	830
Internal Height (mm)	1545	1400	1480	1580
Internal Width (mm)	1345	1285	745	680
Internal Depth (mm)	495	660	700	740
Weight (kg)	230	265	185	200

\* NOTE: The 425L can also be used to hold 2 x 205L drums (1 shelf).



250LX



425L



205LVD



250LE

Trafalgar reserves the right to change specifications without notice. Please check with your supplier at the time of order. The information contained in this brochure was correct at the time of print. E&OE. Published 01.12.15.